

# USER GUIDE

## STANDARD RANGE

### LITHIUM BATTERIES



**iTECHWORLD**  
THE POWER EXPERT



# CONTENTS

1.	<b>Product Overview</b>	<b>4</b>
	Overview	4
	Key Features	4
	Package Contents	4
2.	<b>Getting Started</b>	<b>5</b>
	Installation	5
	Discharge Curve	5
	Wiring Diagrams	6
	Storage	7
	Safe Mode	7
	Optimising your Charging	9
3.	<b>Specifications</b>	<b>10</b>
	Product Dimensions	11
4.	<b>Safety Precautions</b>	<b>13</b>
5.	<b>Contact Us</b>	<b>Back Page</b>

# OVERVIEW

The iTechworld Standard Range represents a significant advancement in deep cycle lithium battery technology. These batteries come equipped with an integrated Battery Management System that enables compatibility with a wide range of charging systems, catering perfectly to caravans, motor homes, RVs, and more. They have been designed with reliability in mind, ensuring power you can rely on in a wide range of environments.

## KEY FEATURES:

- Australian design and development
- LiFePO4 battery
- Compact and lightweight
- Heavy duty ABS casing
- High discharge rate
- iTechworld BMS
- Over discharge protection (Safemode)
- A grade cylindrical cells

## Package Contents

 <p>1x iTechworld Standard Range Battery</p>	 <p>User Guide</p>
--	---


# GETTING STARTED

## INSTALLATION

Standard Range batteries can be installed in any orientation, except for upside down (with terminals facing down).

## DISCHARGE CURVE

Please note that a lithium battery’s discharge curve will differ from your previous lead acid batteries. Please refer to the discharge curve graph to better understand how a lithium battery will perform.

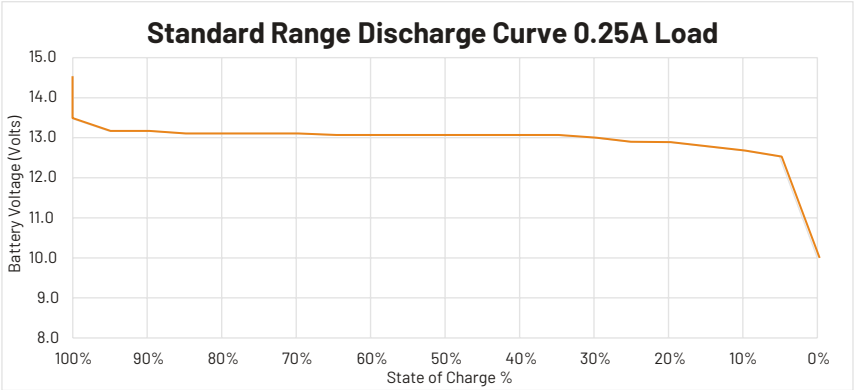

Percentage	Voltage under load
100%	13.5-14.6
95%	13.3
90%	13.3
85%	13.2
80%	13.2
75%	13.2
70%	13.2
65%	13.1
60%	13.1
55%	13.1
50%	13.1
45%	13.1
40%	13.1
35%	13.1
30%	13.0
25%	12.9
20%	12.9
15%	12.8
10%	12.7
5%	12.5
0%	10.0

# PARALLEL CONNECTION



# SERIES CONNECTION



## STORAGE

When your iTechworld Standard Range battery is not in use, it is recommended to completely isolate the battery, charge it up to 13.5V and check the voltage every 3 months, then charging the battery as needed. To ensure your battery is completely isolated, it's essential to disconnect it from any connected devices or systems.

You can also keep our maintenance chargers connected permanently, but if the battery is going to be completely out of use, keeping it connected is not necessary.

## SAFE MODE

We are committed to delivering the safest batteries in the Australian market, which is why we've integrated multiple safety features, including over-current, over-voltage, high and low temperature, cross polarity and over-discharge protections. In the event that any of these safety features are activated, the iTechworld battery will drop into Safe Mode, rendering it temporarily unusable until it is brought out of Safe Mode.

In nearly all situations, except for when the battery's voltage falls below 10.5V, the battery is designed to automatically exit Safe Mode. For example, if the battery's internal temperature surpasses 60°C, it will enter Safe Mode. However, as soon as the internal temperature drops below 60°C, the battery will automatically recover and exit Safe Mode.

**Please follow one of the below procedures to bring your iTechworld lithium battery out of safe mode.**

If you have a solar panel in ideal weather, please follow the below steps in sequence to bring your battery out of Safe Mode.

- Disconnect all loads/inputs from the battery.
- Connect your 'flat' battery to an unregulated solar panel.
- Leave the battery connected to the panel for 5 minutes.
- Once the 5 minutes is up, disconnect the battery from the panel.

- Reconnect the battery to another charging source as soon as possible (DCDC charger, regulated solar panel, AC charger etc.)
- The charger should continue to charge the battery, bringing it out of Safe Mode.

If you have a portable jump starter, follow the below steps in sequence to bring your battery out of Safe Mode.

- Disconnect all loads/inputs from the battery.
- Connect the jump starter cables to the battery (positive to positive, negative to negative).
- Connect an ACDC charger to the battery. We recommend a three-stage 20A or higher charger.
- Activate the jump starter to supply power to the battery. The charger will now detect the battery and begin to charge.
- When the charger begins to charge the battery, disconnect the jump starter from the battery.
- The charger should continue to charge the battery, bringing it out of Safe Mode.

If you have a charged battery (e.g. a car battery) and jumper cables, follow the below steps in sequence to bring your battery out of Safe Mode.

- Disconnect all loads/inputs from the battery.
- Connect the iTechworld battery in parallel to a different battery.
- Connect an ACDC charger to the battery at the same time as the paralleled battery and allow it to begin charging. We recommend a three-stage 20A or higher charger.
- When the charger begins to charge the battery, disconnect the second battery.
- The charger should continue to charge the battery, bringing it out of Safe Mode.



# OPTIMISING YOUR CHARGING

Embedded within every iTechworld battery lies a sophisticated Battery Management System (BMS) which sets our batteries apart from conventional lead-acid, calcium, or even other lithium batteries.

This BMS enables the battery to accept a broad range of charging profiles, including Lead Acid, Gel and AGM, making it versatile for various charging systems. However, it's important to note that the battery is not compatible with calcium charging profiles.

For optimal performance in systems with adjustable parameters, we recommend following the guidelines below. However, if your charger offers a dedicated lithium charging profile, it's advisable to use that profile for the best results.

Charge Stage	12V Charge Voltage	24V Charge Voltage
BULK	14.4V	28.8V
ABS	14.4V	28.8V
FLOAT	13.5V	27V

# RECOMMENDED CHARGING CURRENT

Model	Charge Current	Battery Voltage
ITECH200	1A-100A	12V
ITECH100	1A-50A	
ITECH54	1A-25A	
ITECH24	1A-13A	
ITECH7	1A-4A	
ITECH24V100	1A-50A	24V


# SPECIFICATIONS

General Specifications	
Battery Type	LiFePO4
Voltage	12V
Nominal Voltage	12.8V
Short Circuit Protection	Yes
Optimum Temperature Range	0°C - 45°C
BMS Operational Temperature	-20°C - 60°C
Safety Protection Isolator	60°C
Recommended Charge Voltage	14.4V
BMS Charge Cut Off	15V
BMS Low Voltage Cut Off	10.5V
Series Connection	Up to 48V (4 x batteries)
Parallel Connection	Up to 4 batteries
Life Cycles @ 80% Depth of Discharge	2,000+
Life Cycles @ 40% Depth of Discharge	4,000+
Terminal Type	M8
Case Material	ABS

For more information on specifications please visit our website and select your iTechworld Standard Range battery.

Scan to visit our website







# SAFETY PRECAUTIONS

For safe operation and optimal performance, iTechworld Standard Range batteries must be installed and operated correctly. Please carefully read, understand, and follow all instructions and guidelines in this user guide. Failure to follow these instructions may result in damage to the unit, property, death or serious injury.

**Disclaimer:** While iTechworld has taken every precaution to ensure the accuracy of the contents of this user guide, iTechworld assumes no responsibility for any errors or omissions.

**Furthermore, all specifications and functionality may change at any time without notice.**

It is best to view our website for the most up-to date information

## **WARNING:**

Do not use any type of oil, organic solvent, alcohol, detergent, strong acids, strong alkalis, petroleum-based solvent or ammonia solution to clean the battery covers and plates. These materials may cause permanent damage to the battery covers and end plates and will void the warranty.

## **WARNING:**

People with physical disabilities, visual, sensory or mental impairments (including children) should not use this device. Children should be supervised to ensure they do not play with the battery.

## **WARNING:**

Avoid using the battery near fire.

## **WARNING:**

Never smoke or allow a spark or flame in the vicinity of the battery. This may cause the battery to explode.

## **WARNING:**

Do not drop the battery.

## **WARNING:**

Do not use the battery and its accessories to connect equipment if there is a defect.

**WARNING:**

Do not disassemble or modify the battery; doing so may result in a risk of electrical shock, fire, death, or serious injury.

**WARNING:**

Do not use this battery in series or parallel with another battery of different chemistry or capacity.

**WARNING:**

Do not leave the battery in Safe Mode for longer than 7 days.

**WARNING:**

Don't ignore any warning signs that may appear throughout use of the battery (e.g. unusual heat or swelling).

**LIMITATIONS OF USE:**

Do not use in connection with life support systems or other medical equipment or devices.

# iTECHWORLD

THE POWER EXPERT

## CONTACT US



1300 483 249



[service@itechworld.com.au](mailto:service@itechworld.com.au)



[www.itechworld.com.au](http://www.itechworld.com.au)

When it comes to energy storage and creation at iTechworld, we take pride in being one of the biggest names in the industry. Based in Australia, we are a family-owned and operated business. With many more innovative products on the horizon we are committed to constantly raising the bar to provide bigger and better benefits to all our customers Australia-wide.


Whether you're an avid camper, 4WD enthusiast, freedom seeker or camper, we've got your power needs covered. Escape the grid without compromise, minimise your downtime and travel with comfort with our large range of leading products at great prices.

**iTechworld. The Power Expert.**


**LOVE YOUR STANDARD RANGE BATTERY? LEAVE A REVIEW**



**Google**  
Reviews ★★★★★



**PRODUCT  
REVIEW**  
.COM.AU



**★ Trustpilot**  
★★★★★

