

USER GUIDE

US RANGE

ULTRA SLIM LITHIUM BATTERIES



iTECHWORLD
THE POWER EXPERT

CONTENTS

1.	Overview	3
	Key Features	3
	Package Contents	3
2.	Installation	4
	Wiring Diagrams	4
3.	Operation	6
	Bluetooth	6
	Discharge Curve	6
	Voltage Chart	7
	Discharge Rates	8
	Safe Mode	8
	Charging	10
4.	Specifications	11
	Product Dimensions	12
	Certifications	13
5.	Maintenance	13
	Storage	13
6.	Safety Precautions	14
7.	Contact Us	Back Page




OVERVIEW

Designed and developed in Australia, the Ultra Slim battery range offers maximum power in a sleek, lightweight design. With impressive energy density and management, these ultra-thin batteries provide exceptional performance with the most compact footprint in the market. Ideal for dual-battery systems and vehicle modifications, they deliver reliable, long-lasting power. With efficiency and durability in mind, the Ultra Slim range ensures seamless integration into even the tightest installations.

KEY FEATURES

- Australian design and development
- Bluetooth monitoring
- LiFePO4 battery
- Compact and lightweight
- Heavy duty metal casing
- High discharge rate
- iTechworld BMS
- Over discharge protection (safe mode)
- Long cycle life
- A-grade prismatic cells

PACKAGE CONTENTS

 1x iTechworld US Range Battery	 User Guide	 2x M8 Bolts
--	---	--

INSTALLATION

The iTechworld US Range lithium batteries are designed with a sleek, slimline casing, allowing for easy installation in a wide range of environments. They can be mounted in any orientation except upside down (with the terminals facing downwards). These versatile batteries ensure reliable power delivery whenever, and wherever needed.

WIRING DIAGRAMS

Parallel Connection

BT-200US



BT-300US



Battery Parallel
Cables

BT-200US



BT-300US



OPERATION

BLUETOOTH

Your iTechworld Ultra Slim Range lithium battery features Bluetooth capabilities. To access the Bluetooth user guide and download the iTechworld Connect battery management app, please scan one of the QR codes below or go to your respective app store and search for “iTechworld Connect.”



USER GUIDE




IOS



ANDROID

DISCHARGE CURVE

Please note that a lithium battery’s discharge curve will differ from your previous lead-acid batteries. Please refer to the discharge curve graph to better understand how a lithium battery will perform.

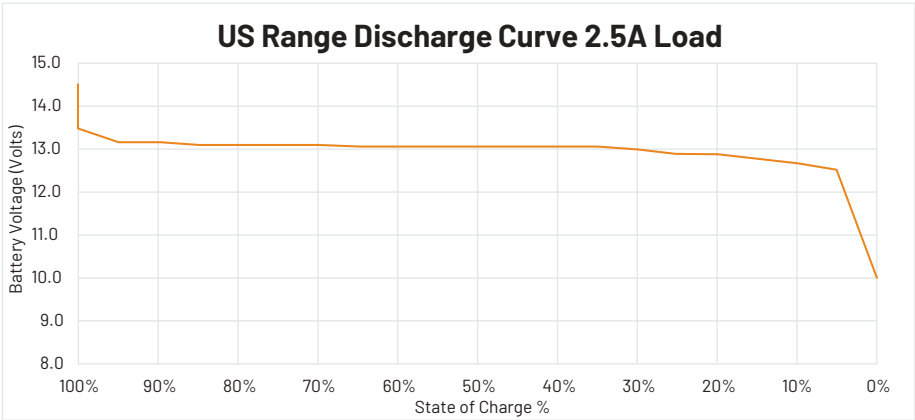

VOLTAGE CHART

State of Charge	Voltage under load 2.5A
100%	13.5-14.6
95%	13.3
90%	13.3
85%	13.2
80%	13.2
75%	13.2
70%	13.2
65%	13.1
60%	13.1
55%	13.1
50%	13.1
45%	13.1
40%	13.1
35%	13.1
30%	13.0
25%	12.9
20%	12.9
15%	12.8
10%	12.7
5%	12.5
0%	10.0

DISCHARGE RATES

Model	Continuous Discharge	Maximum Discharge
BT-300US	200A	640A
BT-200US		

SAFE MODE

We are committed to delivering the safest batteries in the Australian market, which is why we've integrated multiple safety features, including over current, over voltage, high and low temperature, cross polarity and over discharge protections. In the event that any of these safety features are activated, the iTechworld battery will drop into safe mode, rendering it temporarily unusable until it is brought out of safe mode.

In nearly all situations, except for when the battery's voltage falls below 10V, the battery is designed to automatically exit safe mode. For example, if the battery's internal temperature surpasses 80°C, it will enter safe mode. However, as soon as the internal temperature drops below 80°C, the battery will automatically recover and exit safe mode.

Please follow one of the below procedures to bring your iTechworld lithium battery out of safe mode.

If you have a solar panel in ideal weather, please follow the below steps in sequence to bring your battery out of safe mode:

- Disconnect all loads/inputs from the battery.
- Connect your 'flat' battery to an unregulated solar panel.
- Leave the battery connected to the panel for 5 minutes.
- Once the 5 minutes is up, disconnect the battery from the panel.
- Reconnect the battery to another charging source as soon as possible (DCDC charger, regulated solar panel, AC charger).
- The charger should continue to charge the battery, bringing it out of safe mode.

If you have a portable jump starter, follow the below steps in sequence to bring your battery out of safe mode:

- Disconnect all loads/inputs from the battery.
- Connect the jump starter cables with the battery (positive to positive, negative to negative).
- Connect an ACDC charger to the battery. We recommend a three-stage 20A or higher charger.
- Activate the jump starter to supply power to the battery. The charger will now detect the battery and begin to charge.
- When the charger begins to charge the battery, disconnect the jump starter from the battery.
- The charger should continue to charge the battery, bringing it out of safe mode.

If you have a charged battery (e.g. a car battery) and jumper cables, follow the below steps in sequence to bring your battery out of safe mode:

- Disconnect all loads/inputs from the battery.
- Connect the iTechworld battery in parallel to a different battery.
- Connect an ACDC charger to the battery at the same time as the paralleled battery and allow it to begin charging. We recommend a three-stage 20A or higher charger.
- When the charger begins to charge the battery, disconnect the second battery.
- The charger should continue to charge the battery, bringing it out of safe mode.

CHARGING

Embedded within every iTechworld battery lies a sophisticated Battery Management System (BMS), which sets our batteries apart from conventional lead-acid, calcium, and even other lithium batteries.

This BMS enables the battery to accept a broad range of charging profiles, including lead-acid, gel and AGM, making it versatile for various charging systems. However, it's important to note that the battery is incompatible with calcium charging profiles.

For optimal performance in systems with adjustable parameters, we recommend following the guidelines below. However, if your charger offers a dedicated lithium charging profile, it's advisable to use that profile for the best results.

Charge Stage	Charge Voltage
BULK	14.4V
ABS	14.4V
FLOAT	13.5V

Recommended Charging Current

Model	Charge Current
BT-300US	1A-150A
BT-200US	1A-100A

SPECIFICATIONS



General Specifications		
Model Name	BT-300US	BT-200US
Dimensions (LxWxH)	562 (587.5 with terminals) x 82 x 374mm	554 (579.5 with terminals) x 63 x 374mm
Weight	37.5kg	24.8kg
Battery Type	LiFeP04	
Voltage	12V	
Nominal Voltage	12.8V	
Short Circuit Protection	Yes	
Optimum Temperature Range	5°C ~ 60°C	
BMS Operational Temperature	-40°C ~ 80°C	
Safety Protection Isolator	80°C	
Recommended Charge Voltage:	14.4V	
BMS High Voltage Cutoff	15V	
BMS Low Voltage Cutoff	10V	
Series Connection	Up to 48V (4 x Batteries)	
Parallel Connection	Unlimited	
Life cycles @ 40% Depth of Discharge	5,000+	
Life cycles @ 80% Depth of Discharge	10,000+	
Terminal Type	M8	
Case Material	Stainless Steel	

For more information on specifications, please visit our website and select your iTechworld Ultra Slim Range battery.

Scan to visit our website



PRODUCT DIMENSIONS

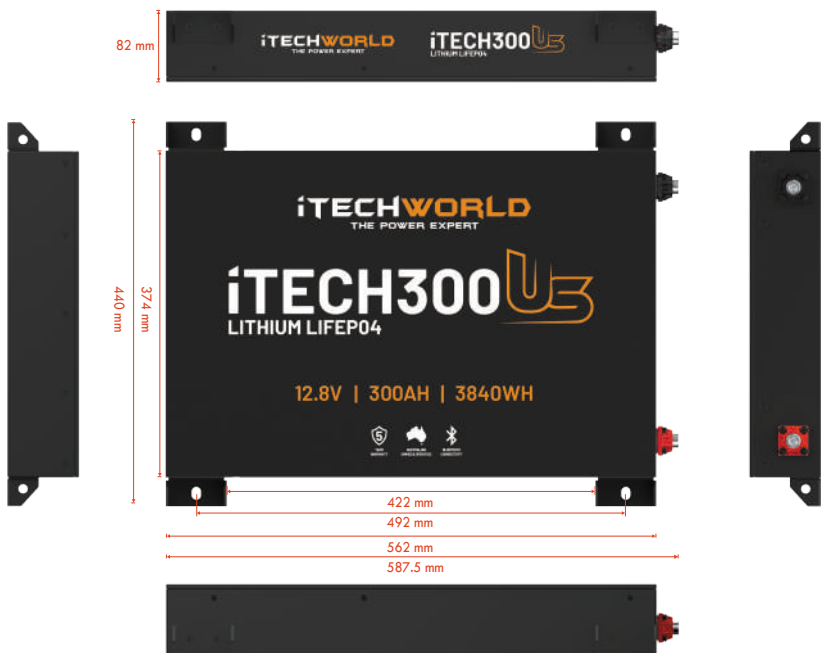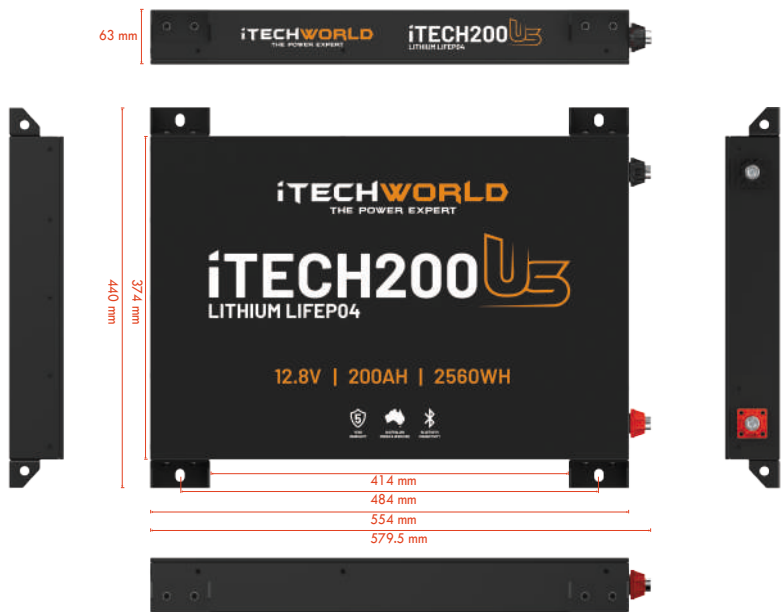

CERTIFICATIONS

Our iTechworld Ultra Slim Range batteries are in compliance with the following standards and certifications:

UL1642
IEC62133
IEC62619
CE
ROHS



RoHS **CE**

MAINTENANCE

To keep your Ultra Slim Battery performing at its best, it is important to fully charge and discharge the unit once every 3 months.

STORAGE

When your iTechworld Ultra Slim Battery is not in use, it is recommended to completely isolate the battery, charge it to 13.5V and check the voltage every 3 months, then charge the battery as needed. To ensure your battery is completely isolated, it is essential to disconnect it from any connected devices or systems

You can also keep our maintenance chargers connected permanently, but if the battery is going to be completely out of use, keeping it connected is not necessary.

SAFETY PRECAUTIONS

For safe operation and optimal performance, iTechworld US Range batteries must be installed and operated correctly. Please carefully read, understand, and follow all instructions and guidelines in this user guide. Failure to follow these instructions may result in damage to the unit, property, death or serious injury.

Disclaimer: While iTechworld has taken every precaution to ensure the accuracy of the contents of this user guide, iTechworld assumes no responsibility for any errors or omissions.

Furthermore, all specifications and functionality may change at any time without notice.

It is best to view our website for the most up-to date information

WARNING:

Do not use any type of oil, organic solvent, alcohol, detergent, strong acids, strong alkalis, petroleum-based solvent or ammonia solution to clean the battery covers and plates. These materials may cause permanent damage to the battery covers and end plates and will void the warranty.

WARNING:

People with physical disabilities, visual, sensory or mental impairments (including children) should not use this device. Children should be supervised to ensure they do not play with the battery.

WARNING:

Avoid using the battery near fire.

WARNING:

Never smoke or allow a spark or flame in the vicinity of the battery. This may cause the battery to explode.

WARNING:

Do not drop the battery.

WARNING:

Do not use the battery and its accessories to connect equipment if there is a defect.

WARNING:

Do not disassemble or modify the battery; doing so may result in a risk of electrical shock, fire, death, or serious injury.

WARNING:

Do not use this battery in series or parallel with another battery of different chemistry or capacity.

WARNING:

Do not leave the battery in safe mode for longer than 7 days.

WARNING:

Don't ignore any warning signs that may appear throughout use of the battery (e.g. unusual heat or swelling).

WARNING:

Do not use the battery in an environment where it will get wet, the unit is not waterproof.

LIMITATIONS OF USE:

Do not use in connection with life support systems or other medical equipment or devices.

CONTACT US

 1300 483 249

 service@itechworld.com.au

 www.itechworld.com.au



At iTechworld, we proudly lead the way in pioneering innovative off-grid power and battery solutions that bring cutting-edge technology to adventure seekers, remote workers, and outdoor enthusiasts across Australia. Since we began our journey all the way back in 2006, our passion has been to develop high-performance lithium batteries, solar panels, power stations, generators, and battery management systems tailored to caravans, camping, 4WDs, and off-grid living.

We believe in empowering people with reliable, portable, and efficient energy solutions, giving them the power they need—wherever their journey takes them. Our commitment to quality is unwavering, with every product rigorously tested to meet Australian conditions and backed by our knowledgeable power experts.

Driven by innovation, reliability, and sustainability, iTechworld is your trusted partner in power solutions, helping you stay powered anywhere, anytime.

iTechworld. The Power Expert.

LOVE YOUR US RANGE BATTERY? **LEAVE A REVIEW**

